Technical Information

Design

BSEN40, PD6547: 2004+A1: 2009 (No sign)

Load class B

Deflection class 3

Head load- See Table

Finish


Galvanised to BSEN 1461:2009

Welding

In accordance with BSEN1011 Procedures to BSEN ISO 15614-1:2004 Welders qualified to BSEN 287-1:2011

* Maximum design head load based on wind loading region with orientation of bracket/ luminaire(s) being on same plane as door

Maximum Loading including Bracket				
Wind Loading Region	Terrain Catagory	Weight/Area		
Extra Light	I	50kg/0.54m ²		
LXUA LIGIT	II	65kg/0.65m ²		
Light	I	45kg/0.44m ²		
	II	60kg/0.56m ²		
Medium	I	36kg/0.38m ²		
	II	55kg/0.51m ²		
Heavy	I	30kg/0.32m ²		
	II	50kg/0.45m ²		
Extra Heavy	I	20kg/0.18m ²		
	II	30kg/0.28m ²		

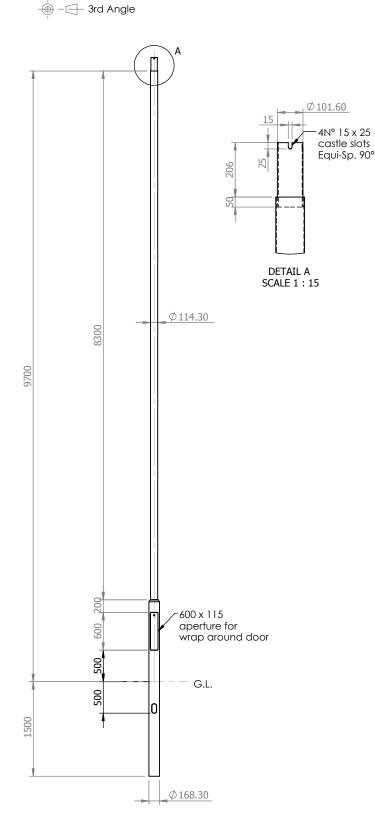

2013 © Copyright

Revisions		
Rev.	Description	Date
1	Loading Table Added	6/12/13

Title

10 Metre Tubular Post Top Column

Exterior Lights UK Ltd Tel.01689 606342 www.exteriorlights.co.uk

Notes

All dimensions in millimetres unless stated otherwise.

When Multiple views are shown 3rd Angle Projection is assumed.

Drg No. 28352-1	Scale:1:60 Sheet 1 of 1
Drawn By: MJB	Chk'd: MB
Ref. 10M01B (HD) FP	
Contract:	
Customer:	Date: 6/12/2013