



## Exterior Lights UK Ltd



The Bodium 15W is a high performance IP65 rated street light optimised for high uniformity and maximum spacing's between columns.

Manufactured from aluminium die-cast housing, stainless steel fixings and featuring a high impact glass cover for additional protection.

Options include Nema socket, LED colour temperature, housing colour and spigot size.

# Bodium 15W - LED Street Light

## Street Lighting



## Features


- LED rating 1,984lm (4000K & 6000K)
- LED rating 1,664lm (3000K)
- Luminaire flux 1,746m (4000K & 6000K)
- Luminaire flux 1,464lm (3000K)
- Total wattage 15W
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Osram LED and Osram Driver.
- Post-top or side-entry, 34/60/76mm spigot options.
- Aluminium die-casting housing for maximum heat dissipation
- Optimised optics for high uniformity and maximum spacing's between columns.

## Applications

- Roads
- Residential
- Railway Stations
- Shopping Precincts
- Parks & Gardens
- Security

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

**01689 606 342**

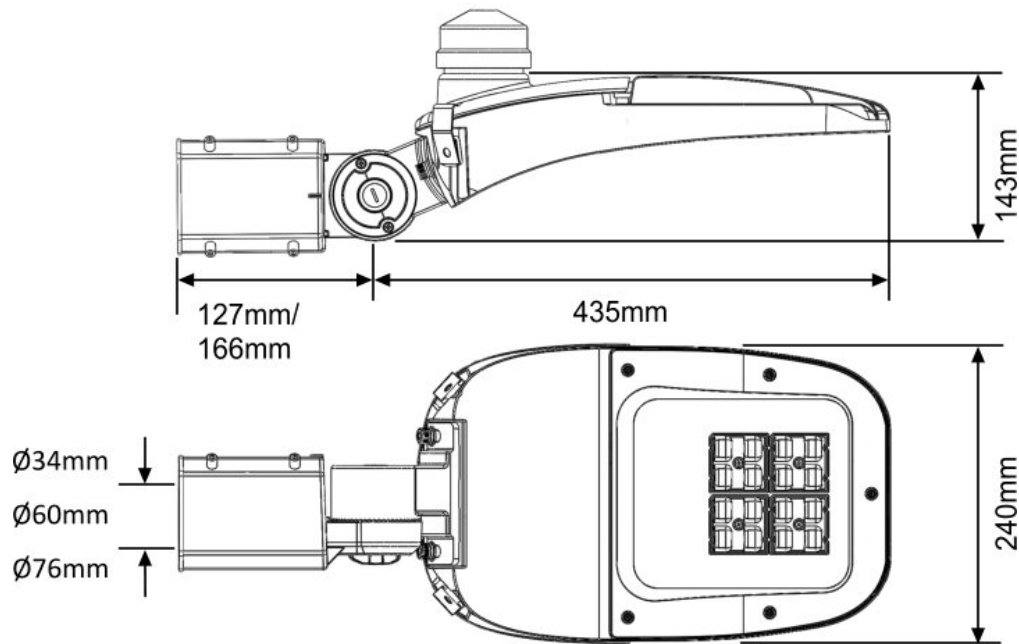

## Specifications

### Bodium 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
<b>Standard - 6K</b>															
F15-A2C-00G-34	Bodium-15W-LED-AC-6K-Std-Grey-34mm	LED	1,984	15	CW	6K	Ra>70	220-240	245	1,746	116	6.0	Grey	34	
F15-A2C-00G-60	Bodium-15W-LED-AC-6K-Std-Grey-60mm	LED	1,984	15	CW	6K	Ra>70	220-240	245	1,746	116	6.0	Grey	60	
F15-A2C-00G-76	Bodium-15W-LED-AC-6K-Std-Grey-76mm	LED	1,984	15	CW	6K	Ra>70	220-240	245	1,746	116	6.0	Grey	76	
<b>Standard - 4K</b>															
F15-A2N-00G-34	Bodium-15W-LED-AC-4K-Std-Grey-34mm	LED	1,984	15	NW	4K	Ra>70	220-240	245	1,746	116	6.0	Grey	34	
F15-A2N-00G-60	Bodium-15W-LED-AC-4K-Std-Grey-60mm	LED	1,984	15	NW	4K	Ra>70	220-240	245	1,746	116	6.0	Grey	60	
F15-A2N-00G-76	Bodium-15W-LED-AC-4K-Std-Grey-76mm	LED	1,984	15	NW	4K	Ra>70	220-240	245	1,746	116	6.0	Grey	76	
<b>Standard - 3K</b>															
F15-A2W-00G-34	Bodium-15W-LED-AC-3K-Std-Grey-34mm	LED	1,664	15	WW	3K	Ra>80	220-240	245	1,464	98	6.0	Grey	34	
F15-A2W-00G-60	Bodium-15W-LED-AC-3K-Std-Grey-60mm	LED	1,664	15	WW	3K	Ra>80	220-240	245	1,464	98	6.0	Grey	60	
F15-A2W-00G-76	Bodium-15W-LED-AC-3K-Std-Grey-76mm	LED	1,664	15	WW	3K	Ra>80	220-240	245	1,464	98	6.0	Grey	76	
<b>Standard - Nema Socket - 6K</b>															
F15-A2C-05G-34	Bodium-15W-LED-AC-6K-Std-Nema Socket-Grey-34mm	LED	1,984	15	CW	6K	Ra>70	220-240	245	1,746	116	6.0	Grey	34	
F15-A2C-05G-60	Bodium-15W-LED-AC-6K-Std-Nema Socket-Grey-60mm	LED	1,984	15	CW	6K	Ra>70	220-240	245	1,746	116	6.0	Grey	60	
F15-A2C-05G-76	Bodium-15W-LED-AC-6K-Std-Nema Socket-Grey-76mm	LED	1,984	15	CW	6K	Ra>70	220-240	245	1,746	116	6.0	Grey	76	
<b>Standard - Nema Socket - 4K</b>															
F15-A2N-05G-34	Bodium-15W-LED-AC-4K-Std-Nema Socket-Grey-34mm	LED	1,984	15	NW	4K	Ra>70	220-240	245	1,746	116	6.0	Grey	34	
F15-A2N-05G-60	Bodium-15W-LED-AC-4K-Std-Nema Socket-Grey-60mm	LED	1,984	15	NW	4K	Ra>70	220-240	245	1,746	116	6.0	Grey	60	
F15-A2N-05G-76	Bodium-15W-LED-AC-4K-Std-Nema Socket-Grey-76mm	LED	1,984	15	NW	4K	Ra>70	220-240	245	1,746	116	6.0	Grey	76	

# Specifications

## Bodium 15W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage(W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Drive Current	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	KG	Unit Colour	Spigot Size (mm)	
<b>Standard - Nema Socket - 3K</b>															
F15-A2W-05G-34	Bodium-15W-LED-AC-3K-Std-Nema Socket-Grey-34mm	LED	1,664	15	WW	3K	Ra>80	220-240	245	1,464	98	6.0	Grey	34	
F15-A2W-05G-60	Bodium-15W-LED-AC-3K-Std-Nema Socket-Grey-60mm	LED	1,664	15	WW	3K	Ra>80	220-240	245	1,464	98	6.0	Grey	60	
F15-A2W-05G-76	Bodium-15W-LED-AC-3K-Std-Nema Socket-Grey-76mm	LED	1,664	15	WW	3K	Ra>80	220-240	245	1,464	98	6.0	Grey	76	

Legend: **Std** = Standard. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

Options:

**Grey (RAL 7037) Housing** - Standard.

**Black (RAL 9005) Housing** - Change '00G' to '00B'