


1 Channel Analogue Decoder

for Single Colour LED strip

DIM-0101CH(N)

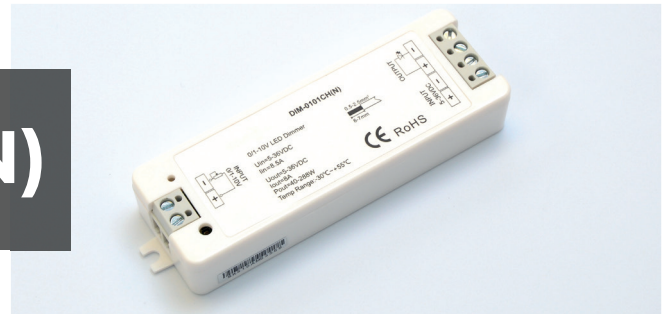

Technical Specification

Decoder	
Order Code	DIM-0101CH(N)
Type	analogue decoder
Input Voltage	5-36VDC
Current	1X8A
Output	40-288W
Note	Constant voltage
Dimension	33x97x18mm (WxLxH)


Product Description

This single channel analogue decoder is a single output module, featuring PWM smooth dimming from 0-100%. This product is compact and easy to install and is compatible with standard 0/1-10V protocols.


Features

- 1 channel 0/1-10V signal input
- PWM dimming output can achieve 4096 levels of flickerless dimming
- 0-100% smooth dimming
- Compatible with 0-10V, 1-10V dimmers
- Compatible with signal repeater to expand your LED lighting.

Decoder layout

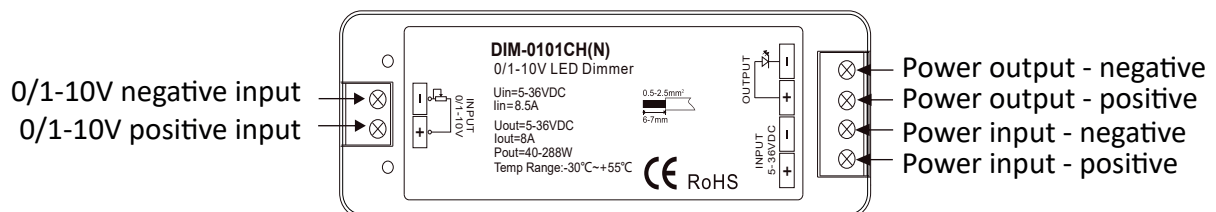

Decoder wiring diagram for single colour strip

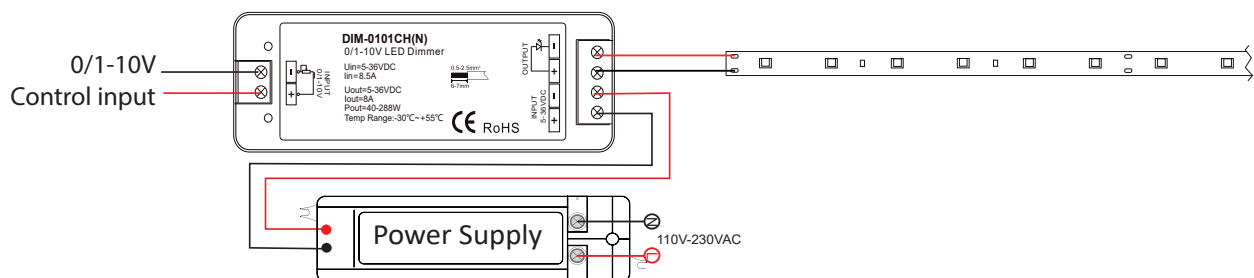

1 Channel Analogue Decoder

for Single Colour LED strip

INTALED

The input control 0/1-10V signal wire should be firmly attached by tightening the screws on the receiver terminal.

The power input must be rated 12-36VDC (DO NOT INSERT MAINS 240VAC).

When wiring the decoders, it is important to make sure the total wattage of the LED strips does not exceed the maximum rated wattage of the decoder. The product is rated at 8A, so the maximum wattage per channel is $24 \times 8A = 192W$.

The power supply has to match the rated voltage and be superior to the total LED strip wattage by a recommended 10%.

Troubleshoot

Problem	Cause	Corrective
No light	<ul style="list-style-type: none">• No power.• Wrong connection or unsecure connection.	<ul style="list-style-type: none">• Check the power.• Check the connection.
Uneven intensity between front and rear of the strip, with voltage drop	<ul style="list-style-type: none">• Output cable is too long.• Cable diameter is too small.• Overload beyond driver capability.• Overload beyond receiver capability.	<ul style="list-style-type: none">• Reduce cable or loop supply.• Change to a thicker cable.• Replace with a suitable higher power driver.• Add a power repeater.

Safety

- Products must be installed and serviced by qualified electrician.
- Please ensure the receiver is mounted in a water proof enclosure if installed in an outdoor environment, avoiding metallic enclosures.
- Always ensure products are mounted in areas with adequate ventilation to avoid overheating.
- Please ensure outputs of any power suppliers used in conjunction with this product comply with its working voltage.
- Never install product whilst connected to power and double check connections before switching on to avoid short circuits.

Guarantee:

All LED and electrical components carry a 5 year electrical guarantee, All lamps have their own average life span. We recommend all products are installed by NICEIC / registered electrical contractors, failure to do so will result in any guarantee becoming void.

Full Terms & Conditions:

For our full terms and conditions please visit our website - www.intalite.co.uk/terms-conditions

INTALITE UK
148 - 154 Merton High Street;
London, SW19 1AZ, UK
Tel: +44 (0)20 8542 1471
Fax: 0870 4211 763
www.intalite.co.uk
sales@intalite.co.uk



V002-11-2019

www.intalite.co.uk