



Exterior Lights UK Ltd

The Cranbrook is a traditional IP65 rated LED Post Top with a 360° light distribution.


Manufactured with high pressure die-cast aluminium and a prismatic diffuser for a controlled distribution of light.

Options include Mini Photocell, Nema Socket and Dali.



Cranbrook 30W - LED Post Top

Amenity Lighting

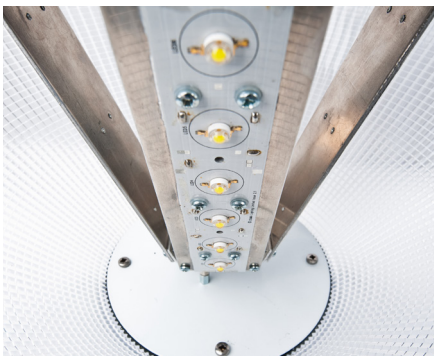

Features


- LED rating 3,960lm (4000K & 6000K).
- LED rating 3,350lm (3000K).
- Luminaire flux 3,437lm (4000K & 6000K).
- Luminaire flux 2,908lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature .
- LED Life span > 100,000hrs.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell, Nema Socket and Dali.
- Manufactured with high pressure die-cast aluminium.
- Diffuser manufactured from UV stabilised polycarbonate.
- Prismatic diffuser for a controlled distribution of light.
- Corrosion resistant polyester powder coating.

Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

www.exteriorlights.co.uk

01689 606 342

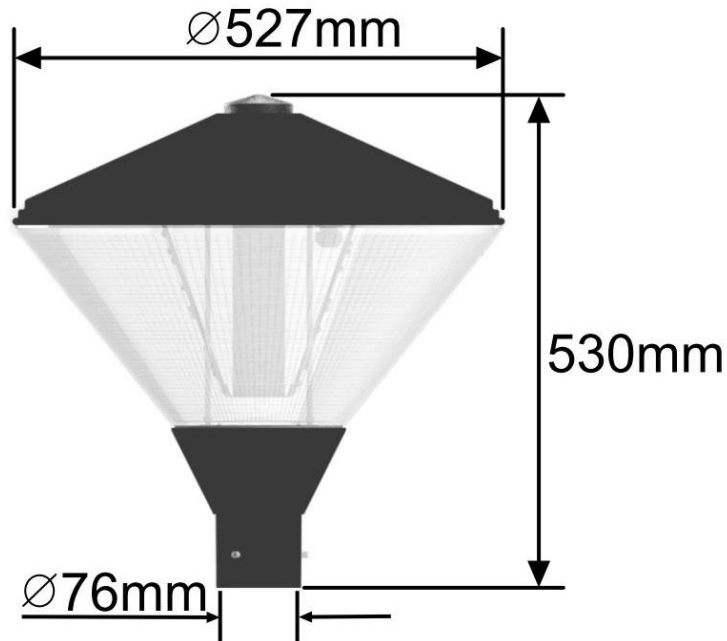

Specifications

Cranbrook 30W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT(K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
Standard														
TP30-A3C-00B-76	Cranbrook-30W-LED-AC-6K-Std-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3N-00B-76	Cranbrook-30W-LED-AC-4K-Std-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3W-00B-76	Cranbrook-30W-LED-AC-3K-Std-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,908	97	5.75	Black	76
Standard - Mini Photocell														
TP30-A3C-04B-76	Cranbrook-30W-LED-AC-6K-Std-M/Photocell-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3N-04B-76	Cranbrook-30W-LED-AC-4K-Std-M/Photocell-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3W-04B-76	Cranbrook-30W-LED-AC-3K-Std-M/Photocell-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,908	97	5.75	Black	76
Standard - Nema Socket														
TP30-A3C-05B-76	Cranbrook-30W-LED-AC-6K-Std-NemaSocket-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3N-05B-76	Cranbrook-30W-LED-AC-4K-Std-NemaSocket-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3W-05B-76	Cranbrook-30W-LED-AC-3K-Std-NemaSocket-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,908	97	5.75	Black	76
Dali														
TP30-A3C-20B-76	Cranbrook-30W-LED-AC-6K-Dali-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3N-20B-76	Cranbrook-30W-LED-AC-4K-Dali-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,437	115	5.75	Black	76
TP30-A3W-20B-76	Cranbrook-30W-LED-AC-3K-Dali-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,908	97	5.75	Black	76

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk
01689 606 342



V220615