



## Exterior Lights UK Ltd

The Kemsing is a high performance IP65 rated LED post top /globe.


Manufactured with high pressure die-cast aluminium and an elegant prismatic diffuser for an ornate feel and a controlled distribution of light.

Options include Mini Photocell and Dali.



# Kemsing 45W - LED Globe

## Amenity Lighting

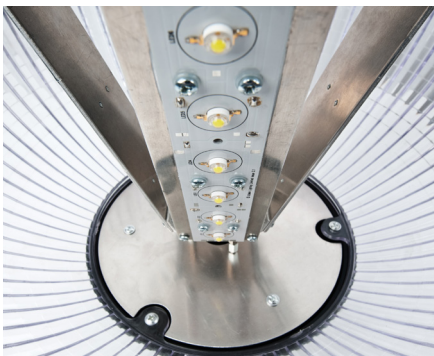

## Features


- LED rating 5,880lm (4000K & 6000K).
- LED rating 4,974lm (3000K).
- Luminaire flux 5,086lm (4000K & 6000K).
- Luminaire flux 4,303lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature.
- LED Life span > 100,000hrs.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell and Dali.
- Manufactured with high pressure die-cast aluminium.
- Diffuser manufactured from UV stabilised polycarbonate.
- Prismatic diffuser for an ornate feel and a controlled distribution of light.

## Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

[www.exteriorlights.co.uk](http://www.exteriorlights.co.uk)

**01689 606 342**

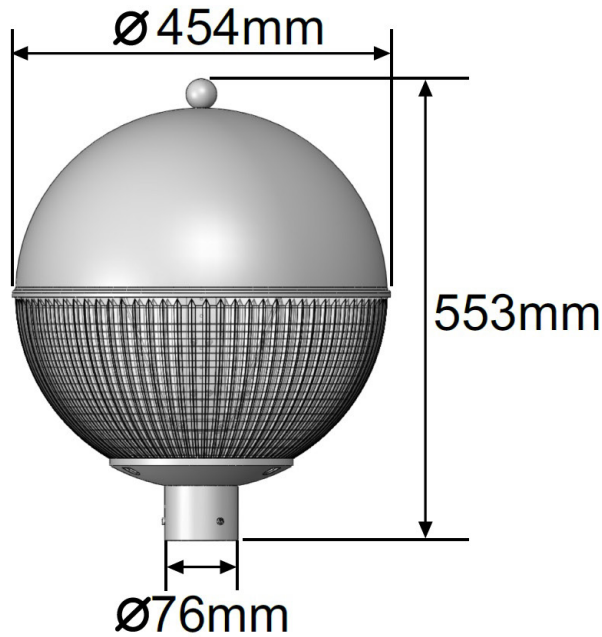

## Specifications

### Kemsing 45W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)
<b>Standard - Black Top</b>														
WG45-A5C-00B-76	Kemsing-45W-LED-AC-6K-Standard-BlackTop-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,086	113	5.25	Black	76
WG45-A5N-00B-76	Kemsing-45W-LED-AC-4K-Standard-BlackTop-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,086	113	5.25	Black	76
WG45-A5W-00B-76	Kemsing-45W-LED-AC-3K-Standard-BlackTop-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,303	96	5.25	Black	76
<b>Standard - Mini Photocell</b>														
WG45-A5C-04B-76	Kemsing-45W-LED-AC-6K-Standard-M/Photocell-BlackTop-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,086	113	5.25	Black	76
WG45-A5N-04B-76	Kemsing-45W-LED-AC-4K-Standard-M/Photocell-BlackTop-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,086	113	5.25	Black	76
WG45-A5W-04B-76	Kemsing-45W-LED-AC-3K-Standard-M/Photocell-BlackTop-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,303	96	5.25	Black	76
<b>Dali</b>														
WG45-A5C-20B-76	Kemsing-45W-LED-AC-6K-Dali-BlackTop-76mm	LED	5,880	45	CW	6K	Ra>70	220-240	525	5,086	113	5.25	Black	76
WG45-A5N-20B-76	Kemsing-45W-LED-AC-4K-Dali-BlackTop-76mm	LED	5,880	45	NW	4K	Ra>70	220-240	525	5,086	113	5.25	Black	76
WG45-A5W-20B-76	Kemsing-45W-LED-AC-3K-Dali-BlackTop-76mm	LED	4,974	45	WW	3K	Ra>80	220-240	525	4,303	96	5.25	Black	76

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www.exteriorlights.co.uk  
01689 606 342



V220615