



Exterior Lights UK Ltd



The Lingfield 10w is a slim architectural path marker bollard offering both aesthetic appeal and high performance illumination.

Manufactured from extruded aluminium alloy (grade 6063) with die-cast aluminium components and non corrosive Stainless Steel fixings. Finished in pure polyester powder Graphite Grey (RAL 7024) paint.

The Lingfield 10w will integrate very well in most urban landscape projects thanks to its discreet design and minimal energy consumption

Options available include bolt-on root and mini photocell.

Bollard Lighting



Features

- LED rating 1320lm (4000K & 6000K).
- LED rating 1117m (3000K).
- Luminaire flux 1135lm (4000K & 6000K).
- Luminaire flux 960lm (3000K).
- 3000K, 4000K and 6000K colour temperature options.
- -20 to +40°C operating temperature (Emergency 0 to +40°C).
- LED life span > 100,000hrs.
- Osram LED and Osram driver.
- Easy access to LED and driver via a removable head.
- Tamper proof fixings for increased vandal resistance.
- Manufactured from extruded die cast aluminium with strong UV stabilised polycarbonate lens.
- Finished in pure polyester powder Graphite Grey (RAL 7024) paint.


Applications

- Prestigious Grounds
- Walk Ways
- Car Parks
- Security
- Parks and Gardens
- Amenity Areas


www.gemmalighting.com

0800 999 5201


Dimensions

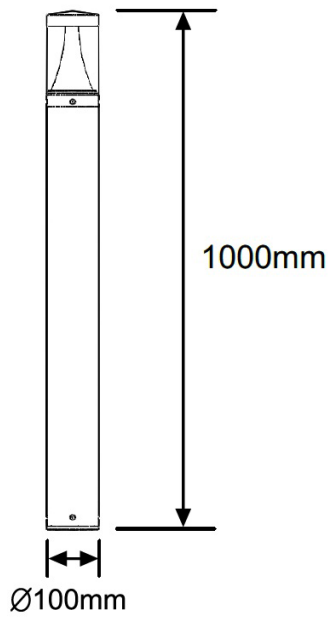

Fixing Options

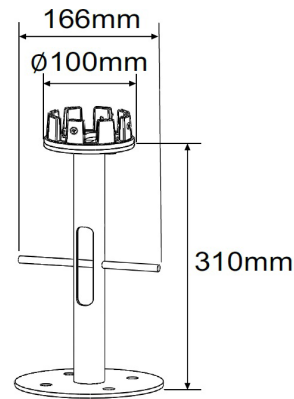

FIX-0430



FIX-0431

Specifications

Lingfield 10W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour (RAL)
Standard												
SPM10-AC-00GH-1000	Lingfield-10W-LED-AC-6K-Std-RAL7024-1000mm	LED	1320	10	6K	Ra>70	220-240	350	1135	114	3.5	7024
SPM10-AN-00GH-1000	Lingfield-10W-LED-AC-4K-Std-RAL7024-1000mm	LED	1320	10	4K	Ra>70	220-240	350	1135	114	3.5	7024
SPM10-AW-00GH-1000	Lingfield-10W-LED-AC-3K-Std-RAL7024-1000mm	LED	1117	10	3K	Ra>80	220-240	350	960	96	3.5	7024
Standard - Mini Photocell												
SPM10-AC-04GH-1000	Lingfield-10W-LED-AC-6K-Std-M/Photocell-RAL7024-1000mm	LED	1320	10	6K	Ra>70	220-240	350	1135	114	3.5	7024
SPM10-AN-04GH-1000	Lingfield-10W-LED-AC-4K-Std-M/Photocell-RAL7024-1000mm	LED	1320	10	4K	Ra>70	220-240	350	1135	114	3.5	7024
SPM10-AW-04GH-1000	Lingfield-10W-LED-AC-3K-Std-M/Photocell-RAL7024-1000mm	LED	1117	10	3K	Ra>80	220-240	350	960	96	3.5	7024

Legend: **Std** = Standard. **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K).

