



The Smarden is a popular IP65 rated LED Post Top with a modern and stylish feel.

Manufactured with a beautiful aluminium louvre stack and featuring a coated black upper canopy to ensure a controlled distribution of light with minimal glare.

Options include Mini Photocell, Dali and spigot size 76mm or 60mm.

Smarden 30W - LED Globe

Amenity Lighting




Features

- LED rating 3,960lm (4000K & 6000K).
- LED rating 3,350lm (3000K).
- Luminaire flux 3,445lm (4000K & 6000K).
- Luminaire flux 2,915lm (3000K).
- 3000K (WW), 4000K (NW) and 6000K (CW) colour temperature options.
- -20 to +40°C operating temperature.
- LED life span > 100,000hrs.
- Osram LED and Osram Driver.
- Easy access to LED and Driver via a removable head.
- Options available include Mini Photocell, Dali and 180° Spill Shield.
- Manufactured from UV stabilised polycarbonate.
- Louvres for optimum performance and minimal upward light.

Applications

- Car Parks
- Retail Parks
- Walk Ways
- Parks & Gardens
- Security
- Amenity Areas

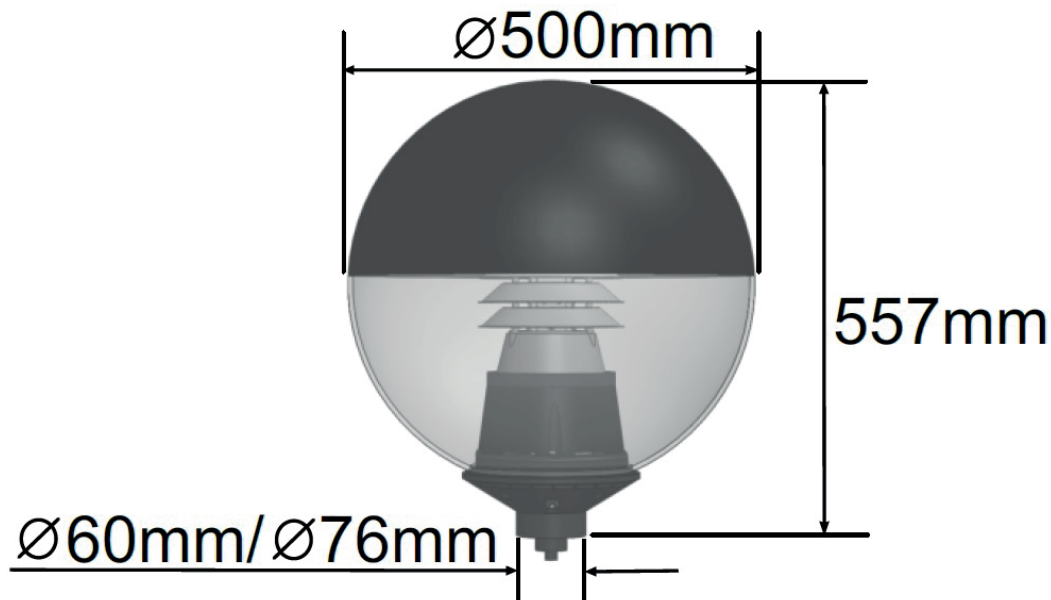

Specifications

Smarden 30W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
Standard - Black Top															
JG30-A3C-00B-60	Smarden-30W-LED-AC-6K-Std-Black-60mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Black	60	
JG30-A3C-00B-76	Smarden-30W-LED-AC-6K-Std-Black-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Black	76	
JG30-A3N-00B-60	Smarden-30W-LED-AC-4K-Std-Black-60mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Black	60	
JG30-A3N-00B-76	Smarden-30W-LED-AC-4K-Std-Black-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Black	76	
JG30-A3W-00B-60	Smarden-30W-LED-AC-3K-Std-Black-60mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Black	60	
JG30-A3W-00B-76	Smarden-30W-LED-AC-3K-Std-Black-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Black	76	
Standard - Silver Top															
JG30-A3C-00S-60	Smarden-30W-LED-AC-6K-Std-Silver-60mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Silver	60	
JG30-A3C-00S-76	Smarden-30W-LED-AC-6K-Std-Silver-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Silver	76	
JG30-A3N-00S-60	Smarden-30W-LED-AC-4K-Std-Silver-60mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Silver	60	
JG30-A3N-00S-76	Smarden-30W-LED-AC-4K-Std-Silver-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Silver	76	
JG30-A3W-00S-60	Smarden-30W-LED-AC-3K-Std-Silver-60mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Silver	60	
JG30-A3W-00S-76	Smarden-30W-LED-AC-3K-Std-Silver-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Silver	76	

Specifications

Smarden 30W

Item Number	Description	Light Source	LED Rating (lm)	Total Wattage (W)	Colour Name	CCT (K)	CRI	Voltage (VAC)	Driver Current (mA)	Luminaire Flux (lm)	Luminaire Efficacy (lm/W)	Kg	Unit Colour	Spigot Size (mm)	
Standard - Black - Mini Photocell															
JG30-A3C-04B-60	Smarden-30W-LED-AC-6K-Std-M/Photocell-Black-60mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Black	60	
JG30-A3C-04B-76	Smarden-30W-LED-AC-6K-Std-M/Photocell-Black-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Black	76	
JG30-A3N-04B-60	Smarden-30W-LED-AC-4K-Std-M/Photocell-Black-60mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Black	60	
JG30-A3N-04B-76	Smarden-30W-LED-AC-4K-Std-M/Photocell-Black-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Black	76	
JG30-A3W-04B-60	Smarden-30W-LED-AC-3K-Std-M/Photocell-Black-60mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Black	60	
JG30-A3W-04B-76	Smarden-30W-LED-AC-3K-Std-M/Photocell-Black-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Black	76	
Standard - Silver - Mini Photocell															
JG30-A3C-04S-60	Smarden-30W-LED-AC-6K-Std-M/Photocell-Silver-60mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Silver	60	
JG30-A3C-04S-76	Smarden-30W-LED-AC-6K-Std-M/Photocell-Silver-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Silver	76	
JG30-A3N-04S-60	Smarden-30W-LED-AC-4K-Std-M/Photocell-Silver-60mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Silver	60	
JG30-A3N-04S-76	Smarden-30W-LED-AC-4K-Std-M/Photocell-Silver-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Silver	76	
JG30-A3W-04S-60	Smarden-30W-LED-AC-3K-Std-M/Photocell-Silver-60mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Silver	60	
JG30-A3W-04S-76	Smarden-30W-LED-AC-3K-Std-M/Photocell-Silver-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Silver	76	
Dali - Black Top															
JG30-A3C-20B-60	Smarden-30W-LED-AC-6K-Dali-Black-60mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Black	60	
JG30-A3C-20B-76	Smarden-30W-LED-AC-6K-Dali-Black-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Black	76	
JG30-A3N-20B-60	Smarden-30W-LED-AC-4K-Dali-Black-60mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Black	60	
JG30-A3N-20B-76	Smarden-30W-LED-AC-4K-Dali-Black-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Black	76	
JG30-A3W-20B-60	Smarden-30W-LED-AC-3K-Dali-Black-60mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Black	60	
JG30-A3W-20B-76	Smarden-30W-LED-AC-3K-Dali-Black-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Black	76	
Dali - Silver Top															
JG30-A3C-20S-60	Smarden-30W-LED-AC-6K-Dali-Smarden-60mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Silver	60	
JG30-A3C-20S-76	Smarden-30W-LED-AC-6K-Dali-Silver-76mm	LED	3,960	30	CW	6K	Ra>70	220-240	350	3,445	115	5	Silver	76	
JG30-A3N-20S-60	Smarden-30W-LED-AC-4K-Dali-Silver-60mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Silver	60	
JG30-A3N-20S-76	Smarden-30W-LED-AC-4K-Dali-Silver-76mm	LED	3,960	30	NW	4K	Ra>70	220-240	350	3,445	115	5	Silver	76	
JG30-A3W-20S-60	Smarden-30W-LED-AC-3K-Dali-Silver-60mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Silver	60	
JG30-A3W-20S-76	Smarden-30W-LED-AC-3K-Dali-Silver-76mm	LED	3,350	30	WW	3K	Ra>80	220-240	350	2,915	97	5	Silver	76	

Legend: **M/Photocell** = Mini Photocell. **3K** = Warm White (3000K). **4K** = Neutral White (4000K). **6K** = Cool White (6000K). **WW** = Warm White. **NW** = Neutral White. **CW** = Cool White.

www exteriorlights.co.uk

01689 606342

