




Flex linear Side View LED strip



Technical drawing

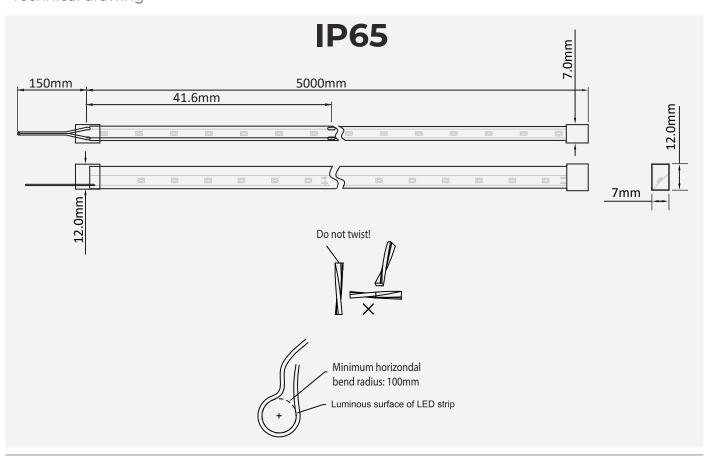













Technical specification

IP rating

15 W/m Max Wattage SMD 2835 LED Chip 168 LEDs LEDs per meter Construction PCB IP65

Self Adhesive Fixture

(3M VHB 5952)

Voltage 24V 5m Length

Horizontal bend radius 100mm

Cut Every 41.6mm

Colour Rendering Index Ra > 90Beam Angle 160° Energy Efficiency Rating

Estimated Life 35.000 hours

-20~+50°C Operating temperature

Product codes

Maximum run length

Product Code	IP Rating	CCT	Lumens/ m	Lumens/ W
FLSV-4WW24K	IP65	2400K	730 lm	48 lm/W
FLSV-4WW30K	IP65	3000K	789 lm	52 lm/W
FLSV-4CW	IP65	4000K	800 lm	53 lm/\//

5_m


Guarantee:

All LED and electrical components carry a 5 year electrical guarantee, All lamps have their own average life span. We recommend all products are installed by NICEIC / registered electrical contractors, failure to do so will result in any guarantee becoming void.

Full Terms & Conditions:

For our full terms and conditions please visit our website - www.intalite.co.uk/terms-conditions

Polar diagram



Note

For compatibility of LED strip with aluminium profile, please refer to the compatibility chart in our catalogue or on our website:

www.intalite.co.uk/compatibilitychart

For power consumption of LED strip and choosing appropriate driver, please refer to power consumption chart in our catalogue or on our website:

www.intalite.co.uk/powerconsumptionchart

INTALITE UK 148 - 154 Merton High Street; London, SW19 1AZ, UK Tel: +44 (0)20 8542 1471 Fax: 0870 4211 763 www.intalite.co.uk sales@intalite.co.uk







