
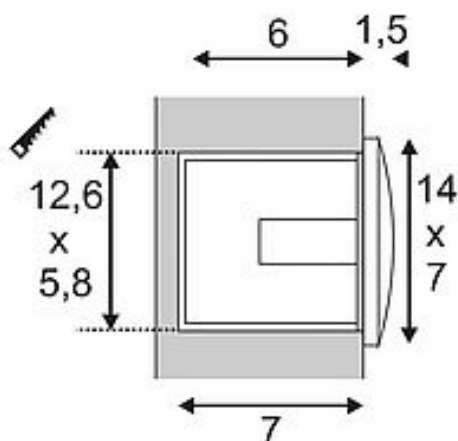


DOWNUNDER OUT LED M

outdoor recessed wall light, LED, 3000K, white

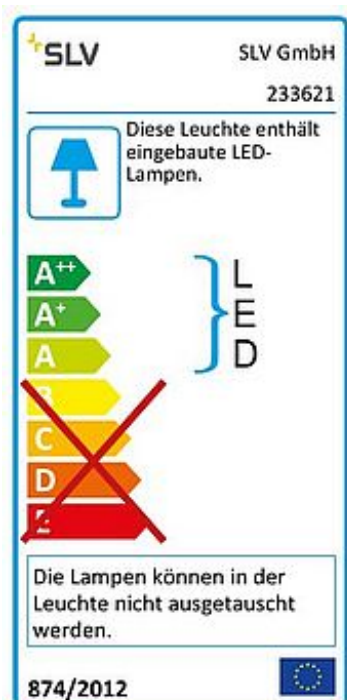

Article number 233621

Feed-in capability No

Lamp included No

Installation length 12.6 cm

Installation width 5.8 cm

Installation depth 7 cm

Width 14 cm

Height 7 cm

Depth 5 cm

Net weight 0.306 kg

Gross weight 0.355 kg

Voltage 220-240V ~50/60Hz sec. 20mA

Protection class I

IP-rating IP 55

Average lifespan 20000 Hours

Colour temperature 3000 Kelvin

Colour rendering index 80

Luminous flux 155 lm

Energy efficiency class A++

Way of mounting Recessed mounted / Wall recessed

Colour white


Form square

Light distribution type 1 direct

Light distribution type 2 symmetric

Light distribution type 3 indirect

Material TBD

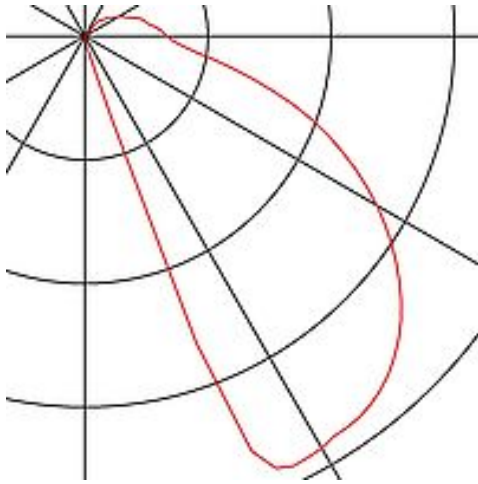

The DOWNUNDER OUT LED M recessed wall light is made of aluminium, and outfitted with high output SMD LEDs that produce downward directed, glare-free light emission. Thanks to its IP55 protection class, the luminaire is suitable for outdoor use. The luminaire is connected directly to the 230V mains supply. A mounting pot is included in the delivery for simple assembly.

Notes
